

低速机边破碎机

LOW SPEED ONLINE GRANULATOR


特点:

- ◎低速破碎, 阶梯形旋转刀排列成V形设计, 噪音低、颗粒均匀、粉末少;
- ◎减速机直接驱动, 运转平稳;
- ◎具有定时开关机功能, 节省能源;
- ◎微电脑控制、具有两料比例阀控制功能, 操作直观, 维护简单;
- ◎投料斗双层隔音设计, 低噪音;
- ◎投料斗、筛网托快捷拆装方式设计, 清理维护更便捷;
- ◎具有缺相逆向保护功能、电机过载保护、限位保护等多重保护装置;
- ◎本机有送料型和抽料型两种选择。

FEATURE:

- ◎Low speed grinding with the V shape stepped rotary cutters design, low noise, evenly output and less dust occurred;
- ◎Direct driven reducer ensures stable running;
- ◎With timing function to turn on or off, saving energy;
- ◎Controlled by microcomputer, with two material proportional valve control function, easy operation and maintenance;
- ◎Double layered soundproof designed feeding hopper, low noise;
- ◎Fast disassembly and assembly design for processing chamber, easy to clean and maintain;
- ◎With multiple protections as phase sequence protection, overload protection, limit protection, etc.;
- ◎Configuration is optional on active or passive collecting;

安装示意图 INSTALLATION DIAGRAM

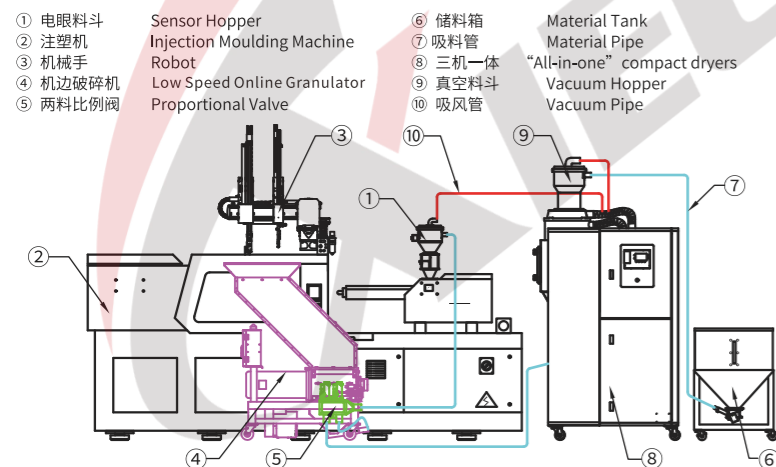


技术参数 SPECIFICATIONS

型号 Model	XC-GS2HP	XC-GS3HP	XC-GS5HP	XC-GS2HPRC	XC-GS3HPRC	XC-GS5HPRC
投料斗口尺寸(mm)Feeding Hopper Size	320x310	380x310	440x310	320x310	380x310	440x310
破碎口径(mm) Grinding Chamber	260x310	320x310	380x310	260x310	320x310	380x310
粉碎能力(Kg/h) Grinding Capacity	22	27	33	22	27	33
功率Power Kw	1.5	2.2	3.7	1.5	2.2	3.7
固定刀(片) Stationary Cutter (Piece)	2	2	2	2	2	2
旋转刀(片) Hook Cutter (Piece)	27	33	39	27	33	39
筛网孔径(mm)	6	6	6	6	6	6
外形尺寸(长*宽*高) LxWxH	850x500x1500	1000x500x1500	1150x500x1500	850x500x1500	1000x500x1500	1150x500x1500
主轴转速(分钟/转) Spindle Speed(R/Min)	140	140	140	140	140	140
风机功率Kw(送料型) Blower Power Kw(Active Collecting)	/	/	/	0.55	0.55	0.55
备注 Note	需另搭配吸料机和比例阀使用 Should be used with auto loader and proportional valve			带回收系统 Equipped with recycled system		

产品规格若有改变, 恕不另行通知。We reserve the right to change specifications without prior notice.



XC-GS5HPRC

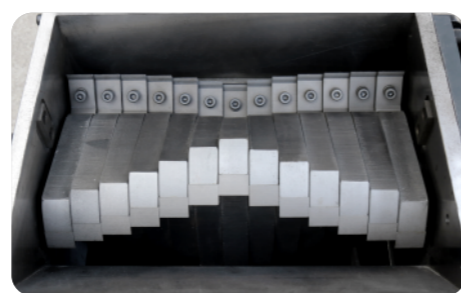

机室 Grinding chamber

中速机边破碎机

MEDIUM SPEED ONLINE GRANULATOR

中速破碎机适用于浇道口物料、料头、次品的即使粉碎再利用, 操作简单, 性能优异; 采用适中的转速运转将粉屑、噪音的产生及刀具磨损降到最低点, 并且设置多种安全保护装置符合欧洲安全标准。

XC-GM medium speed series granulators are applied for instant recycling materials of sprues, runners, insufficient products, which is easy to operate and with excellent functions. The speed is properly designed to minimize powder, running noise and abrasion of cutter blades occurred in crushing process. The series are adopted with multiple safety devices to conform European safety standards.


特点:

- ◎中速破碎, 低能耗, 体积小, 占地面积少;
- ◎维护, 清理便捷, 高安全操作设计;
- ◎刀架采用高强度钢质材料, 前置刀片专利设计, 强度更高, 加大刀片切削角度, 提高切削效率, 成型颗粒形状均匀, 粉末少;
- ◎刀具采用高强度合金工具钢, 硬度高, 耐磨性强, 刀片磨削可重复使用;
- ◎采用内六角螺丝沉孔安装, 不会因为长时间使用而磨损螺丝;
- ◎投料斗四面双层隔音设计, 内层采用不锈钢材质, 中间填充隔音材料, 静音效果好;
- ◎本机有送料型和抽料型两种选择。

FEATURE:

- ◎Medium-speed granulation, low energy consumption, small size and small floor space;
- ◎Convenient for maintenance and cleaning, safety design for operations;
- ◎Blade sets made by once cutting from steel plate, adopted with patent front-positioning blades design enlarging cutting angle and increasing cutting efficiency. Hence the output granules are even and with less powder or dust occurred;
- ◎Blades are made of high-strength steel, with high hardness, good abrasion resistance, and long service life;
- ◎Adopted hexagon socket screw installation way of the blades, free from wearing lose on screws in the long-term utility;
- ◎Feeding hopper with double-layered on 4 sides and the inner layer is made of stainless steel with insulation material in between to provide good noise handling;
- ◎Configuration is optional on active or passive collecting.

安装示意图 INSTALLATION DIAGRAM

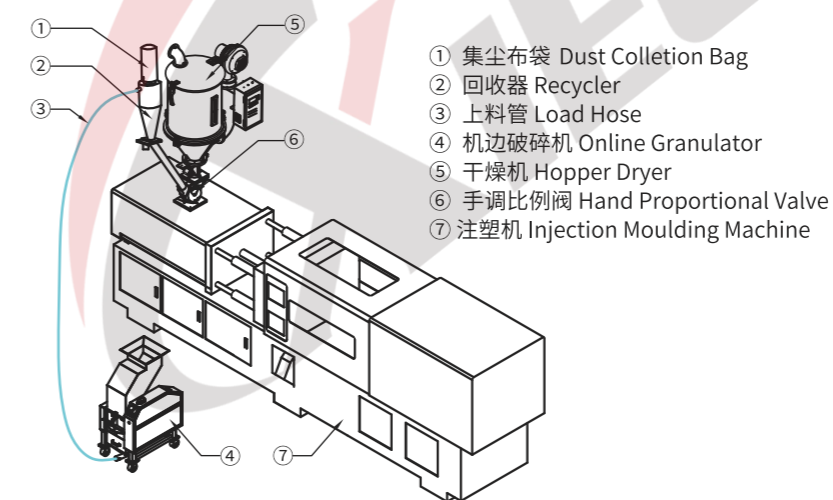


技术参数 SPECIFICATIONS

型号 Model	XC-GM180	XC-GM250	XC-GM310	XC-GM180RC	XC-GM250RC	XC-GM310RC
投料斗口尺寸(mm)Feeding Hopper Size	498×380	498×445	498×505	498×380	498×445	498×505
破碎口径(mm) Grinding Chamber	180×180	250×200	310×200	180×180	250×200	310×200
粉碎能力(Kg/h) Grinding Capacity	40-70	80-100	80-130	40-70	80-100	80-130
功率Power Kw	1.5	2.2	4	1.5	2.2	4
固定刀(片) Stationary Cutter	2	2	2	2	2	2
旋转刀(片) Hook Cutter (Piece)	9	12	15	9	12	15
筛网孔径(mm)	6	6	6	6	6	6
外形尺寸(长*宽*高) LxWxH	790×454×1480	790×496×1480	790×556×1480	790×454×1480	790×496×1480	790×556×1480
主轴转速(分钟/转) Spindle Speed	320	320	320	320	320	320
风机功率Kw(送料型) Blower Power Kw(Active Collecting)	/	/	/	0.55	0.55	0.55
备注 Note	需另搭配吸料机和比例阀使用 Should be used with auto loader and proportional valve			带回收系统 Equipped with recycled system		

产品规格若有改变, 恕不另行通知。We reserve the right to change specifications without prior notice.



XC-GM250

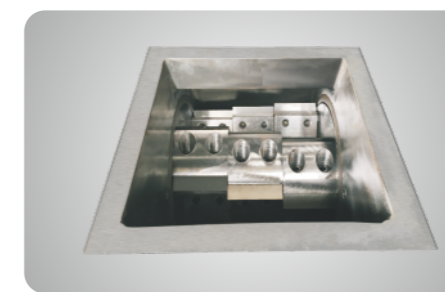

机室 Grinding chamber